


Gasket DN80

3" ANSI, 150 1.5mm Fibre

Working Conditions	
Peak Temperature	+ 400°C
Constant Temperature	+ 240°C
Peak Pressure	up to 11000 kPa
Constant Working Pressure	5000 kPa

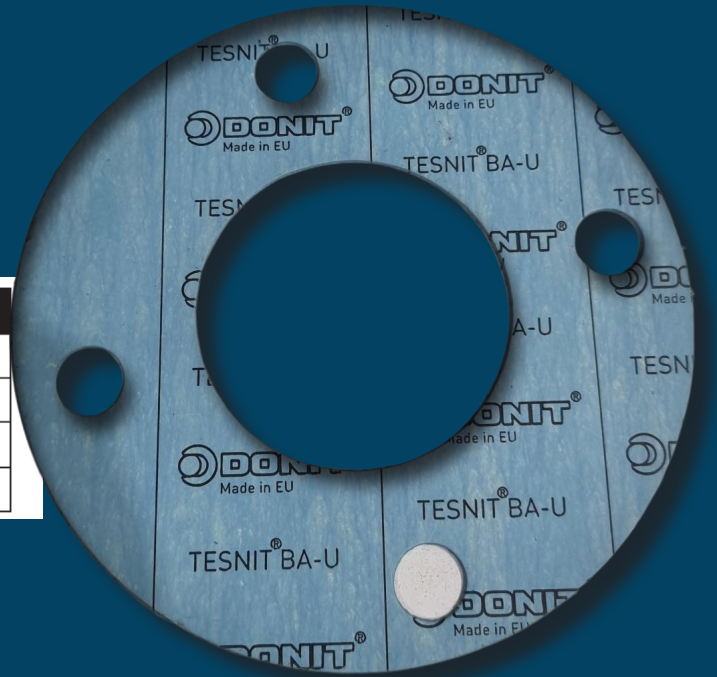

Fiber Gaskets

Fuel Parts supplies compressed fibregaskets made from Aramid fibres, bonded with Nitrile Rubber (NBR). It is manufactured by means of a hot calendar process under rigorous quality control standards that are registered under ISO 9001 certification.

Working Conditions

Peak Temperature - + 400°C

Constant Temperature - + 240°C

Peak Pressure - up to 11000 kPa

Constant Working Pressure - 5000 kPa

Applications:

Air, Water, Low-pressure steam, petroleum derivatives, oil, gas, and general chemical products.

Disclaimer: Information and photographs shown are for marketing purposes only. Actual product may vary to images shown due to continual improvement processes, design changes and optional extras