


Wafer Check Valve

Features:

- Size 15mm to 200mm
- Body 316 Stainless Steel
- Seat Stainless Steel
- Pressure Range 0 to 40 BAR
- Temperature -20°C to 220°C

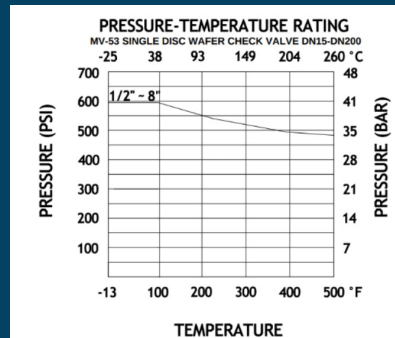

316 Stainless Steel Inline Wafer Single Disc Check Valve. Wafer design to suit ANSI 150/300, DIN PN16/25/40 & Table H (will also fit Table D & E in some sizes, see dimensions tab for flange compatibility). Face to face in accordance with DIN3202-K4. Spring loading allows this check valve to be installed on any angle.

Model	Size (mm)	Media Pressure	Media Temperature	Cracking Pressure (mBar)	Cv
SDC-15	15	0 to 40 BAR	-20°C to 220°C	23	5.1
SDC-20	20	0 to 40 BAR	-20°C to 220°C	23	7.9
SDC-25	25	0 to 40 BAR	-20°C to 220°C	23	11.7
SDC-32	32	0 to 40 BAR	-20°C to 220°C	24	19.8
SDC-40	40	0 to 40 BAR	-20°C to 220°C	25	30.3
SDC-50	50	0 to 40 BAR	-20°C to 220°C	25	50.2
SDC-65	65	0 to 40 BAR	-20°C to 220°C	26	87.5
SDC-80	80	0 to 40 BAR	-20°C to 220°C	26	130.7
SDC-100	100	0 to 40 BAR	-20°C to 220°C	27	200.7
SDC-125	125	0 to 40 BAR	-20°C to 220°C	36	295.3
SDC-150	150	0 to 40 BAR	-20°C to 220°C	36	421.3
SDC-200	200	0 to 40 BAR	-20°C to 220°C	40	597.5

Disclaimer: Information and photographs shown are for marketing purposes only. Actual product may vary to images shown due to continual improvement processes, design changes and optional extras